

## Beaverswood®

Self-Adhesive Label Holders  
15mm, 30mm, and 50mm High

Self-adhesive offers a long term solution of fixing label holders, and more stability in environments where the inserts need to be changed frequently. 3 heights are available - 15mm, 30mm and 50mm, supplied with aggressive high cohesion adhesive strip. Pre cut sizes from stock, special sizes up to 3M available on request. The smaller holders are an ideal solution for the identification of pigeon holes and also suit narrow edge shelving used in schools, libraries and offices.

**Can this product be used in a chilled environment?** Yes, this product is ideal for use in chilled environments. However, we always recommend applying at ambient temperature first and then lowering the temperature. This is to reduce the possibility of ice or moisture getting between the magnetic backing and the steel surface.



## Features and Benefits

- Ideal for identifying permanent locations on shelving and racking.
- Perfect for pigeon holes and shelving.
- Choose from pre-cut stock sizes or can be supplied in custom lengths.
- Supplied with white card insert.
- Protects inserts from damage.
- Highly durable, withstanding daily use in industrial environments.

## Material Specification

### PVC Profile

White "C" - profile extrusion - UV ray resistant. Average thickness 0.8mm, height off surface 3mm.


### Adhesive Strip

Temperature resistance: -30°C to 175°C (when applied at ambient)

Hanging foam test...> 24h

Adhesion (cN/20mm) 2000...2B steel, PC, PVC, PMMA, PET PP

Application; the surfaces to be bonded must be free of dust, release agents or grease.

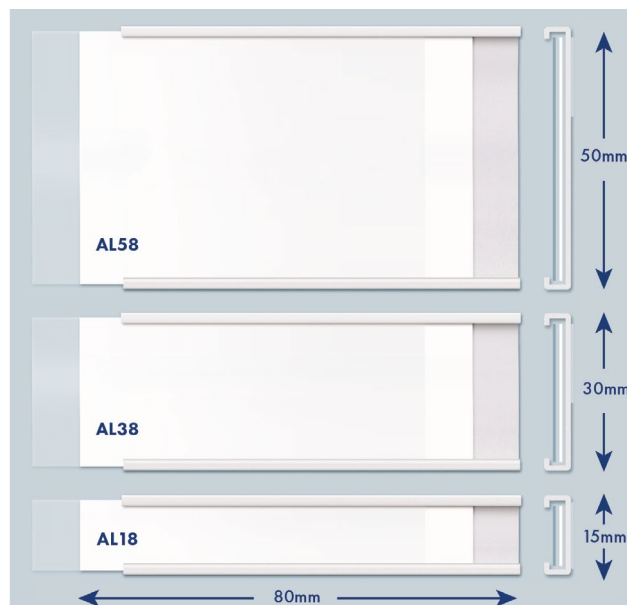

Adhesive Type	Modified acrylic	
Tape Thickness (no liner)	0.220mm	NITTO 01B
Release Liner Type/Colour	Siliconised brown paper	
Release Liner Thickness/Weight	0.075mm-85g/sqm	NITTO 01G-058
Carrier Type	Polyester	
Unwind Force	10cN/50mm	NITTO 35A
Release Value	40cN/50mm	NITTO 37A
Adhesion to Stainless Steel	2000cN/20mm	NITTO 15A
Cohesion to BA	1mm	NITTO 62A
Shear	580 N/sqcm	NITTO 73A (BA steel)