
## **Product Specification**

# **Beaverswood**

Complete Self-Adhesive Packs Numbers and Letters High visibility and simple to apply this range of numbers or letters are supplied on cards with all the same characters. They are simple to apply and can be quickly removed, leaving no residue adhesive.

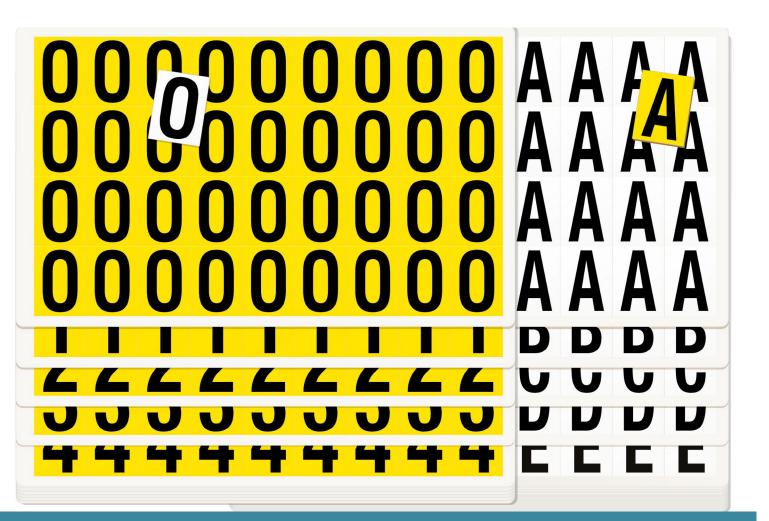

### **Features and Benefits**

- Cards of identical characters.
- Available A-Z (26 cards per pack) or 0-9 (10 cards per pack).
- Clean peel labelling leaves no residue.
- Quick and easy to apply.
- Tough vinyl labels.



## **Product Specification**

### **Material Specification**

#### **Facestock Material**

Monomeric soft PVC film, yellow or white gloss.

#### **Adhesive**

Copolymeric acrylates, solvent free, excellent resistance to UV-light and aging.




Model	Label Size	Character Height	Characters/Card
F3 0-9 and A-Z	19 x 14mm	16mm	36mm
F4 0-9 and A-Z	38 x 21mm	26mm	12mm
F5 0-9 and A-Z	56 x 21mm	50mm	12mm
F6 0-9 and A-Z	90 x 38mm	75mm	6mm
F7 0-9 and A-Z	130 x 45mm	100mm	5mm
F8 0-9 and A-Z	230 x 140mm	160mm	1mm

Parameter	Specification	Test Method
Monomeric PVC soft film	0.075mm	DIN 53 353
Tear resistance (min)	MD 19 N/mm <sup>2</sup> : CD 17 N/mm <sup>2</sup>	DIN 53 353
Tensile strength (min)	MD 30 N/mm <sup>2</sup> : CD 28 N/mm <sup>2</sup>	DIN 53 455
Elongation at beak (min)	MD 170%: CD 200%	DIN 53 455
Adhesive	115gm/cm	
Peel adhesion	20 mins 4 N/25mm	FTM1onglass
Peel adhesion	24 hrs 8 N/25mm	FTM1onglass
Application temperature	+5°C min	
Service temperature	-30°C to +90°C	
Application on toys	Complies	EN 71/3
EC packaging directive	Complies (heavy metals)	94/62/EC
Application non-fatty food	Approved	ISEGA Cert



Rack Group Unit 3, Shawfield Road Carlton Industrial Estate, Barnsley, South Yorkshire S713HS





therackgroup.com