

## **Beaverswood**<sup>®</sup>

Stock Indicator Wheel

Our traffic light wheel can simply be rotated to show the level of stock that is available. Green for good, Amber for getting low and Red for out of stock.



## **Features and Benefits**

- Simple three colour coded system to show stock availability.
- Visual aid when stock isn't visible.
- Three fixing options ideal for stillages, crates, etc.
- Plate dimensions:
  - 90mm high (110mm overall)
  - 140mm wide

## Material Specification

### Wheel Base Product


High impact polystyrene 1.5mm thick.

High gloss/matt finish.

### Magnetic Wheel

Isotropic Magnetic Extrusion of strontium ferrite in a synthetic rubber binder and magnetized multi-pole on one face. Attached by adhesive detailed right.

Temperature range: -30°C to 55°C (above 50°C magnetic losses occur).

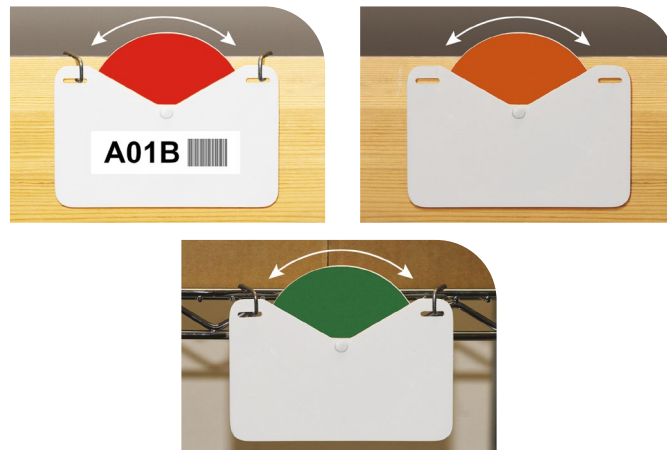

Wheel	Test Method	Units	Base	Capping
Tensile strength at yield	ISO 527	MPa	18	40
Flexural strength	ISO 178	MPa	40	70
Vicat softening point (5kg-50C/h)	ISO 306	°C	90	88
Density	ISO 1183	g/cc	1.05	1.05
Flammability rating at 1.5mm	UL 94	Class	HB	HB

Product	Indicator Wheel
Adhesive type	Modified acrylic
Carrier	Polyethylene cross linked foam
Thickness	1.5mm
Peel adhesive at 23°C	22N/25mm to foam tear
Temperature range	-40°C to 90°C